

WOCA Wood Lye

Wood Lye may be used anywhere indoors for new or freshly sanded solid softwood or light hard wood (beech, oak, birch, maple, pine, larch, fir) of min. 1/2 inch thickness. Wood Lye bleaches the wood and prevents the yellowing process of the wood. It is recommendable to make a test in a non-visible place to evaluate the result.

Wood Lye is available in the container size of 2.5 liter and in the colors white and grey.


Tools

Nylon brush, plastic bucket and stick for stirring. Wear suitable protective clothing, gloves and eye/face protection. Clean tools in water.

How to do...

Wood Lye bleaches solid wood floors and engineered floors of solid wood.

- 1** The unfinished woodwork must be well sanded, clean and dry before application of lye. Clean with a solution of 1/4 cup Wood Cleaner per gallon of water if the wood surface is dirty and allow to dry. Shake the lye container well and pour the lye into a plastic bucket and stir regularly during application to get a uniform finish.
- 2** Apply the lye undiluted with a nylon brush in an even coat on the floor lengthwise. Use at least 1 liter of lye per 100 sq. ft..

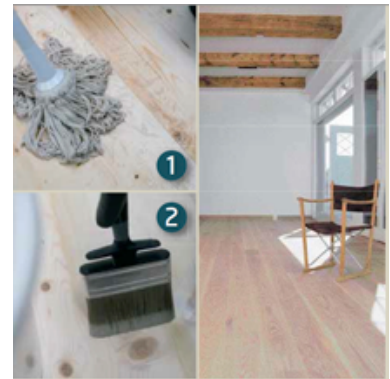

On vertically mounted woodwork, apply from top to bottom. Rinse work tools clean in water.

A lye primed wood floor may finished after a drying time of approx. 8 hours at 68° F (the wood must be completely dry) with Woca Master Oil or Color Oil.